

Condensador UCT CARACTERISTICAS GENERALES




CARACTERISTICAS GENERALES UCT2 DH

MODELO	CAPA. NOMINAL BTU/hr	COMPRESORES		SERPENTINES			MOTOR VENTILADOR			DIMENSIONES MM				CONEXIONES		PESO APROX. KGS.
		NO.	MODELO	NO.	FA	FIL.	HP	RPM	DIA	A	B	B1	C	SUCCION	LIQUIDO	
UCT2 024-DH	2 X 120000	2	AK - 5512	1	3.9	3	1/8.	1500	14	640	460	530	540	(2) 1/2.	(2) 3/8	70
UCT2 030-DH	2X 150000	2	AJ - 5515	2	4.3	3	1/8.	1500	14	640	460	530	595	(2) 5/8	(2) 3/8	80
UCT2 038-DH	2X 190000	2	AJ - 5519	2	4.9	3	1/5.	1500	16	640	460	530	667	(2) 5/8	(2) 3/8	90
UCT2 048-DH	2X 240000	2	AW - 5524	2	6.8	3	1/4.	1500	16	640	550	619	744	(2) 3/4	(2) 3/8	100

CARACTERISTICAS GENERALES UCT2 SV

MODELO	CAPA. NOMINAL BTU/hr	COMPRESORES		SERPENTINES			MOTOR VENTILADOR			DIMENSIONES (mm)				CONEXIONES		PESO APROX. KGS.
		Nº	Modelo	Nº	FA.	FIL.	HP	RPM	DIA	A	B	C	C1	SUCCION	LIQUIDO	
UCTx - 013 - SV	13000	1	AJ - 5513	2	1.2	2	1/15.	1500	12	460	410	440	510	1/2.	3/8.	36.0
UCTx - 015 - SV	15000	1	AJ - 5515	2	1.2	2	1/15.	1500	12	460	410	440	510	5/8.	3/8.	36.5
UCTx - 019 - SV	19000	1	AW - 5519	2	3.0	3	1/15.	1500	12	460	410	490	560	5/8.	3/8.	42.0
UCT2 - 024 - SV	24000	1	AW - 5524	2	3.9	3	1/8.	1500	14	515	460	540	610	3/4.	3/8.	52.5
UCT2 - 031 - SV	31000	1	AH - 5531	2	4.3	3	1/8.	1500	14	515	460	595	665	7/8.	3/8.	59.0
UCT2 - 038 - SV	38000	1	AV - 5538	2	4.9	3	1/4.	1500	16	640	550	540	610	7/8.	1/2.	70.0
UCT2 - 046 - SV	46000	1	AV - 5546	2	6.8	3	1/4.	1500	16	640	550	743	823	11/8.	1/2.	83.0

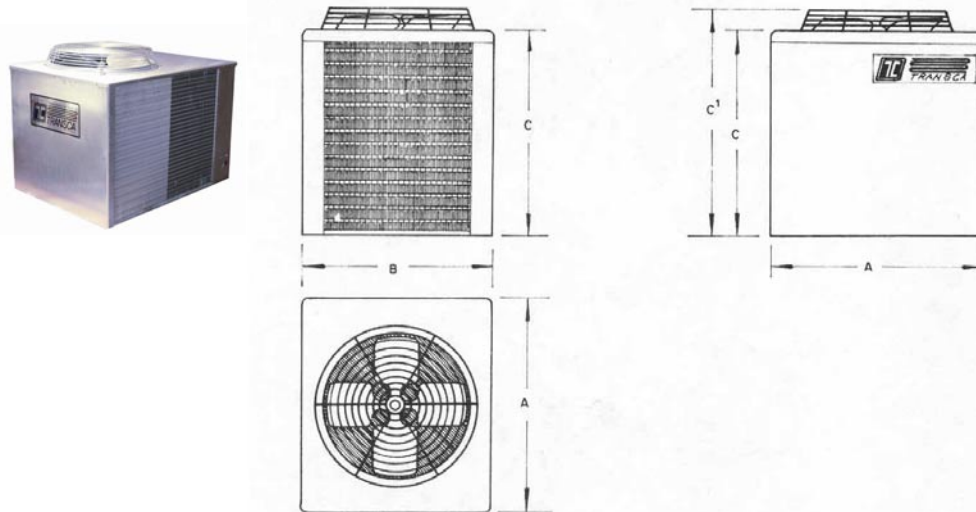

INDUSTRIAS



Unicos en hacer uso extensivo
del aluminio venezolano

Oficina Caracas: Calle Pedro Emilio Coll, Quinta Jeannette, Urb. Santa Mónica, Caracas-Venezuela. Telfs.: 058-0212-662.48.98 / 693.25.23 / 662.91.91/ Telefax: 661.66.45.
Planta: Km 7, vía San Francisco de Yare, Estado Miranda-Venezuela. Telefax.: 058-0212 942.05.51 / 942.05.59 / 942.05.95 / 0239-515.41.54 / 222.98.80 / 222.99.76.

Condensador UCT CARACTERISTICAS GENERALES



CARACTERISTICAS GENERALES UCT2 SH

MODELO	CAPA. NOMINAL BTU/hr	COMPRESORES		SERPENTINES			MOTOR VENTILADOR			DIEMNSIONES MM				CONEXIONES		PESO APROX. KGS.
		NO.	MODELO	NO.	FA	FIL	HP	RPM	DIA	A	B	B1	C	SUCCION	LIQUIDO	
UCTx - 007 - SH	7000	1	AE - 5470	1	1.0	3	1/20.	1500	10	610	190	210	388	3/8.	3/8.	21.0
UCTx - 010 - SH	10000	1	AK - 5510	2	1.5	2	1/15.	1500	12	460	310	380	440	1/2.	3/8.	28.5
UCTx - 012 - SH	12000	1	AK - 5512	2	1.5	3	1/15.	1500	12	460	310	380	440	1/2.	3/8.	31.0
UCTx - 013 - SH	13000	1	AJ - 5513	2	1.2	2	1/15.	1500	12	460	410	480	440	1/2.	3/8.	36.0
UCTx - 015 - SH	15000	1	AJ - 5515	2	1.2	2	1/15.	1500	12	460	410	480	440	5/8.	3/8.	36.5
UCTx - 019 - SH	19000	1	AW - 5519	2	3.0	3	1/15.	1500	12	460	410	480	490	5/8.	3/8.	42.0
UCT2 - 024 - SH	24000	1	AW - 5524	2	3.9	3	1/8.	1500	14	515	460	530	540	3/4.	3/8.	52.5
UCT2 - 031 - SH	31000	1	AH - 5531	2	4.3	3	1/8.	1500	14	515	460	530	595	7/8.	3/8.	59.0
UCT2 - 034 - SH	34000	1	AH - 5534	2	4.9	3	1/5.	1500	16	640	460	530	667	7/8.	1/2.	64.0
UCT2 - 038 - SH	38000	1	AV - 5538	2	4.9	3	1/4.	1500	16	640	460	530	667	7/8.	1/2.	70.0
UCT2 - 046 - SH	46000	1	AV - 5546	2	6.8	3	1/4.	1500	16	640	550	620	744	11/8.	1/2.	83.0
UCT2 - 055 - SH	55000	1	AV - 5555	2	6.8	3	1/4.	1500	16	640	550	620	744	11/8.	1/2.	86.0
UCT2 - 061 - SH	61000	1	AG - 5561	2	6.8	4	1/4.	1500	16	640	550	620	744	11/8.	1/2.	91.0



INDUSTRIAS



Unicos en hacer uso extensivo
del aluminio venezolano

Oficina Caracas: Calle Pedro Emilio Coll, Quinta Jeannette, Urb. Santa Mónica, Caracas-Venezuela. Telfs.: 058-0212-662.48.98 / 693.25.23 / 662.91.91/ Telefax: 661.66.45.
Planta: Km 7, vía San Francisco de Yare, Estado Miranda-Venezuela. Telefax.: 058-0212 942.05.51 / 942.05.59 / 942.05.95 / 0239-515.41.54 / 222.98.80 / 222.99.76.